

THE ULTIMATE ENTRY LEVEL A3 COLOUR MULTIFUNCTION PRINTER FOR CORE OFFICE NEEDS.

A3 multifunction colour printer, ideal for small workgroups needing reliable high-quality printing and scanning.

imageFORCE C3026



BOOST PRODUCTIVITY

Work faster with rapid start-up, and rock-solid reliability to help teams keep business moving. Compatibility with uniFLOW Online ensures seamless connectivity to workflows

SMOOTH USER EXPERIENCE

Simple, intuitive and quiet. Helping everyone get more done with clear on-screen steps, easy controls and a smart preview that shows your print exactly as it will appear - no surprises.

RELIABLE, PROACTIVE SECURITY

Guard every document with 360° protection, AI-driven security settings and strong authentication. Your data stays encrypted, your devices stay defended, and your teams stay confidently productive.

MEET SUSTAINABILITY TARGETS

Reduced power consumption, long-life components and recycled materials make every print a smarter choice for your business – and a lighter one for the planet.

The Canon logo, consisting of the word "Canon" in a white, sans-serif font, set against a red background.




Logic office Equipments LLC

HO : 309 , indigo optima , International city, United Arab Emirates
Phone: +971 54 430 4433 , e-Mail: sales@officeequipments.ae
BR : zayed City - Abudhabi , service center : Ras al khor - 1

imageFORCE C3026

MAIN CONFIGURATION OPTIONS

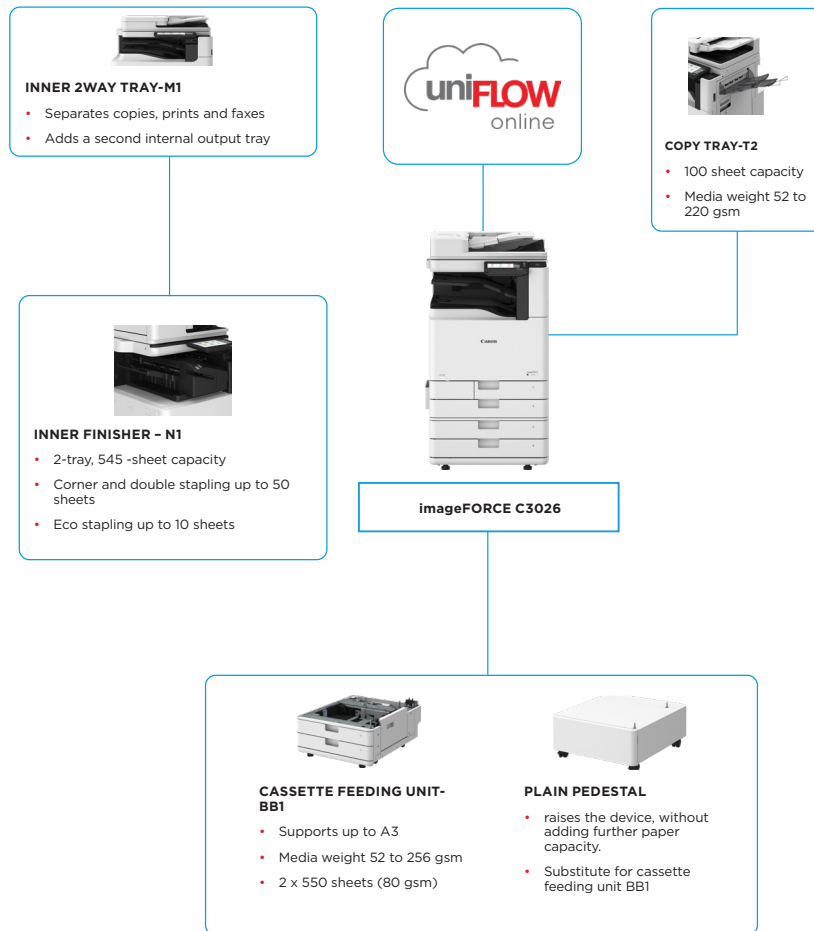

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#).

TECHNICAL SPECIFICATIONS

imageFORCE C3026

MAIN UNIT	
Machine Type	A3 Color Multifunctional
Core Functions	Print, Copy, Scan, Send, Store and Optional Fax
Processor	1.6GHz Dual Core Processor
Control Panel	7 inch TFT LCD WVGA Color Touch panel
Memory	Standard: RAM 3.0GB
Storage	Standard: 64GB eMMC Optional: 256GB SSD
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) OTHERS Standard: USB 2.0 (Host) x2, USB 2.0 (Device)x1
Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets 100 sheets: Multi-purpose tray x 1 550 sheets: Standard Cassette x 2 Maximum: 2,300 sheets (with Cassette Feeding Unit-BB1)
Paper Output Capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 645 sheets (with Inner Finisher-N1 and Copy Tray-T2)
Finishing Capabilities*	Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand *Finishing capabilities vary depending on the options connected.
Supported Media Types	Multi-purpose tray: Thin, Plain, Recycled, Color, Heavy, Coated*, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Envelope * 257~300gsm requires Media Adjustment Kit Upper Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope Lower Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* * Envelope Feeder Attachment Kit A (standard) is required.

Supported Media Sizes	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm Free Size: 100.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes: COM 10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 98.0 mm to 320.0 x 457.2 mm Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 105.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: ISO-C5 Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes*: COM10 No.10, Monarch, DL * Envelope Attachment A (standard) is required.
Supported Media Weights	Multi-purpose tray: 52 to 300 gsm (Only 60 to 300 gsm supported with Media Adjustment Kit*) * Media Adjustment Kit-A1 is required for Coated (257-300gsm) Upper/Lower Cassette: 52 to 256 gsm Duplex: 52 to 220 gsm
Warm-up Time	Quick Startup Mode: 4 seconds From Sleep Mode: 10 Seconds
Dimensions (W x D x H)	565 x 712 x 862 mm
Installation Space (W x D)	Basic: 978 x 1,141 mm (right door & multi-purpose tray opened + paper cassette opened) Fully Configured: 1,285 x 1,141 mm (with Inner Finisher tray max extended + Copy Tray-T2 extended + paper cassette open)
Weight* *including regular toner	Approx. 78 kg



Logic office Equipments LLC

HO : 309 , indigo optima , International city, United Arab Emirates
Phone: +971 54 430 4433 , e-Mail: sales@officeequipments.ae
BR : zayed City - Abudhabi , service center : Ras al khor - 1

TECHNICAL SPECIFICATIONS

imageFORCE C3026

PRINT SPECIFICATIONS	
Print Speed (BW and CL)	1-sided: Up to 26 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 26 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)
Print Resolution (dpi)	4,800 x 2,400
Page Description Languages	Standard: UFR II, PCL6/PCL5 Optional: Adobe® PostScript®3TM
Printing From Mobile And Cloud	AirPrint, Mopria, IPP Everywhere, Canon PRINT, uniFLOW Online, Universal Print A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information
OS Standard Printing	Android, Windows® 11, Chrome OS, macOS (11.2.2 or later), iOS (15.2 or later), iPadOS
Fonts	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2 *1 Optional PCL International Font Set-A1 is required. *2 Optional Barcode Printing Kit-D1 is required.
Print Features	Secure Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Toner Reduction, Poster Printing, Forced Hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
Operating System	UFR II: Windows® 11/Server2016/Server2019/Server2022/Server2025*, macOS(11.7 or later)* PCL: Windows® 11/Server2016/Server2019/Server2022/Server2025* PS: Windows® 11/Server2016/Server2019/Server2022/Server2025*, macOS(11.7 or later)* PPD: Windows® 11, macOS(11.7 or later)* * As of Mar. 2026
COPY SPECIFICATIONS	
Copy Speed (BW and CL)	1-sided: Up to 26 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R) 2-sided: Up to 26 ppm (A4), Up to 15 ppm (A3), Up to 15 ppm (A4R)
First-Copy-Out Time (A4, BW/CL)	Approx. 7.0/8.7 seconds or less
Copy Resolution (dpi)	600 x 600
Multiple Copies	Up to 999 copies
Magnification	Variable zoom: 25% to 400% (1% Increments)
Copy Features	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Sort, Job Build, N on 1, Different Size Originals, Sharpness, Erase Frame, Gutter, Copy ID Card, Skip Blank Pages, Free Size Original, Reserved copy, Copy Sample, Dropout Color

SCAN SPECIFICATIONS	
Type	Standard: Color Scanner, Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic)] * Multi-Sheet Feed Detection is supported as option
Document Feeder Paper Capacity (80 gsm)	up to 100 Sheets
Document Feeder Acceptable PaperWeight	Document Feeder media weight: 1-sided scanning: 38 to 128 gsm (BW, CL) 2-sided scanning: 50 to 128 gsm (BW, CL)
Supported Media Sizes	Platen scanning size: up to 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6, B6R Custom size: 48.0 x 85.0 mm to 304.8 x 431.8 mm
Scan Speed (ipm, BW/CL, A4)	1-sided Scanning: 80/80 (300 x 300 dpi, send) 2-sided Scanning: 120/120 (300 x 300 dpi, send)
Scan Resolution (dpi)	600 X 600
Pull Scan Specifications	Color Network ScanGear2 for both TWAIN and WIA Supported OS: Windows® 11/Server 2016/Server 2019/Server 2022/Server 2025* *As of Mar. 2026
Scan Method	Push Scan, Pull Scan, Scan to Network, Scan to memory media (USB Memory Key), Scan to Mobile Devices, Scan to cloud-based services (uniFLOW Online)
SEND SPECIFICATIONS	
Destination	Standard: E-mail/Internet FAX (SMTP*), SMB, FTP, SFTP, FTPS, WebDAV Optional: Super G3 FAX * Available OAuth 2.0 authentication method on Microsoft Exchange Online and Google Workspace
Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)
Communication Protocol	File: FTP (TCP/IP), SFTP (TCP/IP), FTPS (TCP/IP), SMB3.1.1 (TCP/IP), WebDAV E-mail/iFax: SMTP(send), POP3(receive)
File Format	Standard: TIFF (MMR), JPEG*, PDF (Compact, Searchable, PDF/A-1a, A-1b, PDF/A-2a, PDF/A-2b, PDF/A-2u, PDF/A-3a, PDF/A-3b, PDF/A-3u, Trace&Smooth, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature, User Signature), Office Open XML (PowerPoint, Word) Option: PDF(Trace & Smooth), PDF/XPS (User Signature) * Single-Page only.
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals, Dropout Color
FAX SPECIFICATIONS	



Logic office Equipments LLC

HO : 309 , indigo optima , International city, United Arab Emirates
Phone: +971 54 430 4433 , e-Mail: sales@officeequipments.ae
BR : zayed City - Abudhabi , service center : Ras al khor - 1

TECHNICAL SPECIFICATIONS

imageFORCE C3026

Maximum Number Of Connection Lines	1
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
Compression Method	MH, MR, MMR, JBIG
Resolution (dpi)	400 x 400 (Ultra Fine), 200 x 400 (Super Fine), 200 x 200 (Fine), 200 x 100 (Normal)
Sending/Receiving Size	Sending: A3, A4, A4R, A5* ¹ , A5R* ¹ , A6R* ¹ , B4, B5* ² , B5R* ¹ Receiving: A3, A4, A4R, A5, A5R, B4, B5, B5R * ¹ Sent as A4 * ² Sent as B4 short
FAX Memory	Up to 30,000 pages (2,000 jobs)
Speed Dials	Max. 200
Group Dials/ Destinations	Max. 199 dials
Sequential Broadcast	Max. 256 addresses
Memory Backup	Yes
Fax Features	Sender's Name (TTI), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox

SECURITY SPECIFICATIONS

Authentication And Access Control	User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW* (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Microsoft Entra ID Authentication (Password Login, Card Login), Google Workspace (Password Login, Card Login), Two-Factor Authentication at LUI/RUI, Access Management System (Access Control) * including uniFLOW Online/ uniFLOW
Document Security	Print Security (Secure Print, Encrypted SecurePrint, Forced Hold Printing, uniFLOW Secure Print* ¹), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS* ²), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support) * ¹ Requires optional uniFLOW Online / uniFLOW * ² Requires optional Universal Send Digital User Signature Kit-C1

Network Security	TLS 1.3, IPSec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), WPA3 support, Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Scan and Send -Virus Concerns for E-mail Reception
Device Security	Standard Storage Initialize, Job Log Conceal Function, Protecting MFP Software Integrity: Verify System at Startup (NIST SP800-193: Protection), Checking MFP Software Integrity & Platform Firmware Resiliency: Automatic System Recovery (NIST SP800-193: Recovery), Runtime Intrusion Detection: Trellix Embedded Control
Device Management And Auditing	Administrator Password, Digital Certificate and Key Management, SAN certificates, Audit Log, Cooperating with External Security Audit System (SIEM), Security Policy Setting

ENVIRONMENTAL SPECIFICATIONS

Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
Power Source	220-240 V, 50/60 Hz, 4A
Power Consumption	Maximum: Approx. 1,500 W Copying (with DADF continuous scan): Approx. 547 W* ¹ Standby: Approx. 95 W* ¹ Sleep mode: Approx. 0.8 W* ² * ¹ Reference value: measured one unit * ² Sleep mode is not available in all circumstances due to certain settings. Typical Electricity Consumption (TEC)*: 0.27 kWh *As per USA Energy Star 3.2 For detailed information relating to Erp:Lot6/26 regulation, please go to: https://www.canon-europe.com/for_work/lot26/
Noise Levels (BW/CL)	Sound Power Level (LWA,m) Active (1-sided) : 60dB, kv 3dB Sound Pressure Level (LpAm) Bystander's position: Active (1-sided) : 46dB/47dB *Reference value: measured only one unit with ISO7779, described with ISO9296:2017 Stand-by: Noise-free* **"Noise-free" means that the sound pressure level at each bystander position is below the absolute criterion for background noise specified in ISO 7779.
Standards	Blue Angel

CONSUMABLES

Toner Cartridges	Toner 1008 BK/C/M/Y
Toner Yield (Estimated @5.0% Coverage)	Toner 1008 BK: 15,500 pages Toner 1008 C/M/Y: 8,500 pages



Logic office Equipments LLC

HO : 309 , indigo optima , International city, United Arab Emirates
Phone: +971 54 430 4433 , e-Mail: sales@officeequipments.ae
BR : zayed City - Abudhabi , service center : Ras al khor - 1

TECHNICAL SPECIFICATIONS

imageFORCE C3026

SOFTWARE AND PRINTER MANAGEMENT	
Tracking and Reporting	uniFLOW Online
Remote Management Tools	iW Enterprise Management Console Remote Distribution & Management Service Monitoring Service
Print Support Application	Canon Print Assistant
Scanning Software	Color Network ScanGear 2
Optimisation Tools	Canon Driver Configuration Tool
Platform	MEAP (Multifunctional Embedded Application Platform)

PAPER SUPPLY OPTIONS	
Cassette Feeding Unit-BB1	Paper Capacity: 2 x 550 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Paper Weight: 52 to 256 gsm

OUTPUT OPTIONS	
Inner 2way Tray-M1	Capacity (with 80 gsm paper) Upper tray: A4, A5, A5R, A6R, B5: 100 sheets SRA3, A3,A4R, B4, B5R: 50 sheets Lower tray (standard tray): A4, A5, A5R, A6R, B5: 250 sheets SRA3, A3, A4R, B4, B5R: 100 sheets Paper Weight: 52 to 300 gsm
Copy Tray-T2	Capacity (with 80gsm paper): A4, A5R, B5: 100 sheets A3, A4R, B4, B5R: 75 sheets Paper Weight: 52 to 220 gsm
Inner Finisher-N1	Tray Capacity (with 80gsm paper): Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: approx. 45 sheets Lower Tray: A4, A5, A5R, B5: approx. 500 sheets A3, A4R, B4, B5R: 250 sheets A6R: 30 sheets SRA3, Envelope: 10 sheets Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity:(52 to 90 gsm) A4, B5: 50 sheets A4R: 40 sheets A3, B4: 30 sheets Eco Staple: A3, A4, B4, B5: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: approx. 40 sheets (80 gsm)

Inner 2/4 Hole Puncher-D1	(Requires the Inner Finisher-N1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes: A3, A4, A4R, A5, B4, B5, B5R Four holes: A3, A4
Inner 4 Hole Puncher-D1	(Requires the Inner Finisher-N1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes: A3, A4, A4R, A5, B4, B5, B5R

HARDWARE ACCESSORIES	
Card Readers	IC Card Reader Attachment-B4
Others	Platen Cover-Y3 Document Feeder Double Feeding Detection Kit-A1 Option Attachment kit for Reader-A2 Media Adjustment Kit-A1 Utility Tray-B1

SYSTEM AND CONTROLLER OPTIONS	
Print Accessories	PS Printer Kit-CS1 PCL International Font Set-A1
Send Options	Universal Send Trace & Smooth PDF Kit-A1 Universal Send Digital User Signature Kit-C1
Barcode Printing	Barcode Printing Kit-D1
System Accessories	Optional Data Storage Kit-B1
Fax Accessories	Super G3 FAX Board-BV1 Remote Fax Kit-A1

OTHER OPTIONS	
Staple Cartridges	Staple Cartridge-Z1
Accessibility Accessories	ADF Access Handle-A1



Certifications and compatibility



Logic office Equipments LLC

HO : 309 , indigo optima , International city, United Arab Emirates
Phone: +971 54 430 4433 , e-Mail: sales@officeequipments.ae
BR : zayed City - Abudhabi , service center : Ras al khor - 1

Canon Inc.
Canon.com

Canon Europe
canon-europe.com

English Edition
© Canon Europa N.V. 2026